


7809

3-terminal 1 A positive voltage regulator

Features

- Output Current up to 1 A
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area Protection



1.Input 2.Common 3.Output
TO-220 Plastic Package

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Input Voltage	V_I	35	V
Thermal Resistance Junction-Cases	$R_{\theta JC}$	5	$^\circ\text{C/W}$
Thermal Resistance Junction-Air	$R_{\theta JA}$	65	$^\circ\text{C/W}$
Operating Temperature Range	T_{OPR}	0 to + 125	$^\circ\text{C}$
Storage Temperature Range	T_S	- 65 to + 150	$^\circ\text{C}$

Electrical Characteristics

($0\text{ }^\circ\text{C} < T_J < 125\text{ }^\circ\text{C}$, $I_O = 500\text{ mA}$, $V_I = 15\text{ V}$, $C_I = 0.33\text{ }\mu\text{F}$, $C_O = 0.1\text{ }\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage	V_O	$T_J = 25\text{ }^\circ\text{C}$	8.65	9	9.35	V	
		$5\text{ mA} \leq I_O \leq 1\text{ A}$, $P_O \leq 15\text{ W}$ $V_I = 11.5\text{ V to } 24\text{ V}$	8.6	9	9.4		
Line Regulation ¹⁾	Regline	$T_J = 25\text{ }^\circ\text{C}$	$V_I = 11.5\text{ V to } 25\text{ V}$	-	-	180	mV
			$V_I = 12\text{ V to } 17\text{ V}$	-	-	90	
Load Regulation ¹⁾	Regload	$T_J = 25\text{ }^\circ\text{C}$	$I_O = 5\text{ mA to } 1.5\text{ A}$	-	-	180	mV
			$I_O = 250\text{ mA to } 750\text{ mA}$	-	-	90	
Quiescent Current	I_Q	$T_J = 25\text{ }^\circ\text{C}$	-	-	8	mA	
Quiescent Current Change	ΔI_Q	$I_O = 5\text{ mA to } 1\text{ A}$	-	-	0.5	mA	
		$V_I = 12\text{ V to } 26\text{ V}$	-	-	1.3		
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{ mA}$	-	-1	-	$\text{mV}/^\circ\text{C}$	
Output Noise Voltage	V_N	$f = 10\text{ Hz to } 100\text{ KHz}$, $T_A = 25\text{ }^\circ\text{C}$	-	58	-	μV	
Ripple Rejection	RR	$f = 120\text{ Hz}$, $V_I = 13\text{ V to } 23\text{ V}$	56	-	-	dB	
Dropout Voltage	V_{Drop}	$I_O = 1\text{ A}$, $T_J = 25\text{ }^\circ\text{C}$	-	2	-	V	
Output Resistance	R_O	$f = 1\text{ KHz}$	-	15	-	$\text{m}\Omega$	
Short Circuit Current	I_{SC}	$V_I = 35\text{ V}$, $T_A = 25\text{ }^\circ\text{C}$	-	250	-	mA	
Peak Current	I_{PK}	$T_J = 25\text{ }^\circ\text{C}$	-	2.2	-	A	

¹⁾ Load and line regulation are specified at constant junction temperature, Changes in V_O due to heating effects must be taken into account separately, Pulse testing with low duty is used.



SEMTECH ELECTRONICS LTD.



Typical Performance Characteristics

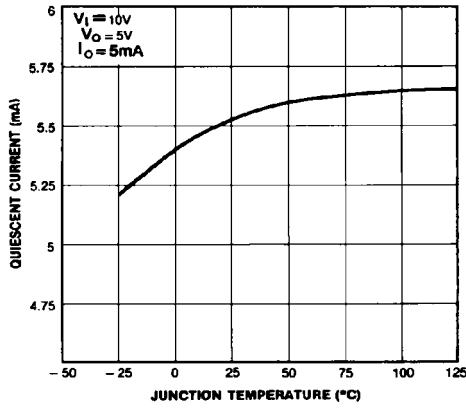


Figure 1. Quiescent Current

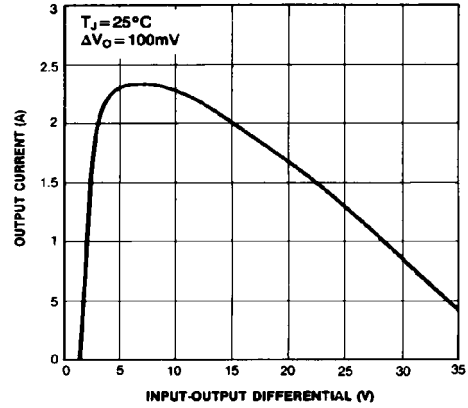


Figure 2. Peak Output Current

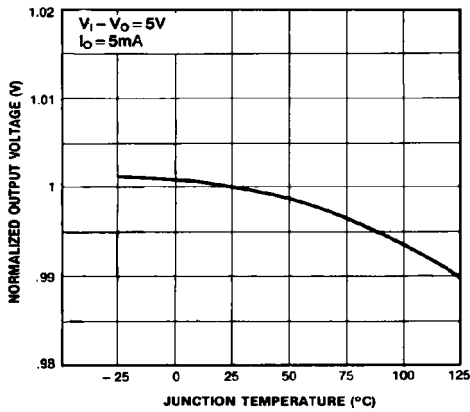


Figure 3. Output Voltage


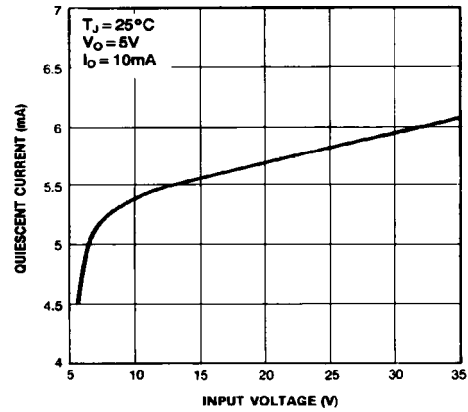


Figure 4. Quiescent Current




SEMTECH ELECTRONICS LTD.




ISO/TS 16949 : 2009 Certificate No. 180713080 | ISO14001 : 2004 Certificate No. 7116 | ISO 9001 : 2008 Certificate No. 50713410 | BS-OHSAS 18001 : 2007 Certificate No. 7116 | IECQ QC 080000 Certificate No. PRC-HSPM-1483-1

TO-220 PACKAGE OUTLINE

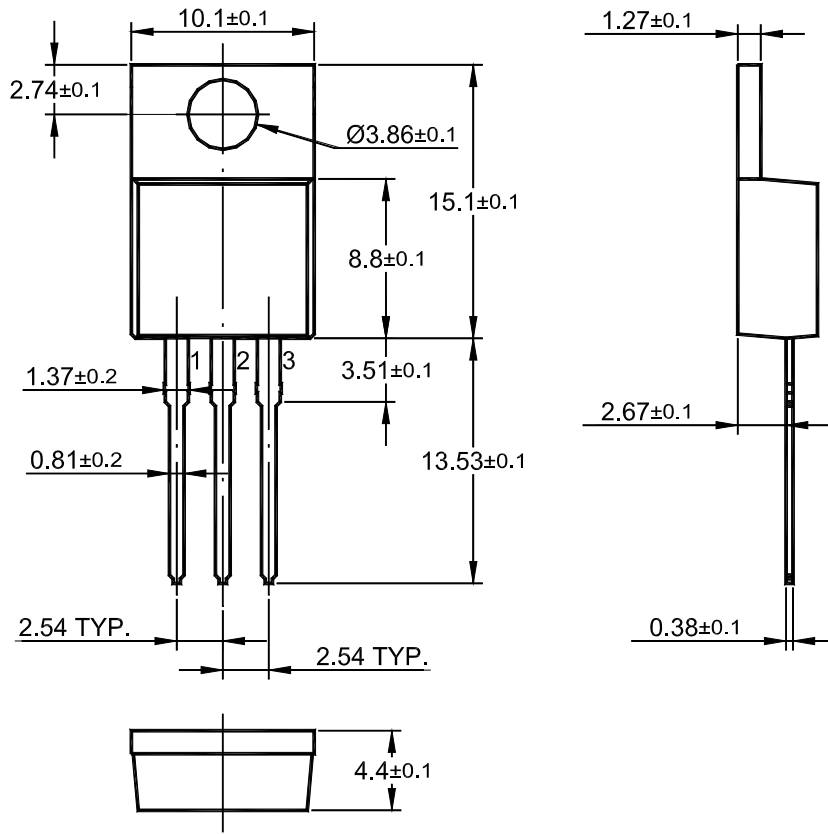

Dimensions in mm



SEMTECH ELECTRONICS LTD.

